

# LFP12100D(12V100Ah)

## Specifications

Nominal Voltage		12 V
Capacity (25°C)	10HR(10.8V)	100 Ah
	5HR(10.5V)	87Ah
	1HR(9.60V)	62.5Ah
Dimension	Length	330±2mm (12.99inch)
	Width	171±2mm (6.73inch)
	Height	214±2mm (8.43inch)
	Total Height	T5: 224±2mm (8.82inch) T9: 220±2mm (8.66inch)
Approx. Weight		30kg (66.2lbs)±4%
Terminal type		T5/T9
Internal resistance (Fully charged, 25°C)		Approx. 4.5mΩ
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage(25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		30A
Terminal material		Copper
Maximum discharge current		800A(5 sec.)
Designed floating life(20°C)		7~10 years

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL & CE;
- ◆ ABS container.

## Constant Current Discharge Characteristics (A, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	214	167	101	62.6	36.5	25.5	20.9	17.9	12.2	10.2	5.34
9.90V	208	163	99.0	61.7	36.3	25.4	20.8	17.7	12.2	10.2	5.33
10.2V	199	157	96.0	60.1	36.0	25.2	20.6	17.6	12.1	10.1	5.32
10.5V	191	151	93.6	58.9	35.5	25.0	20.5	17.5	12.0	10.1	5.29
10.8V	180	143	90.2	57.1	34.6	24.3	19.9	17.0	11.6	10.0	5.25

## Constant Power Discharge Characteristics (Watt, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	2313	1830	1133	714	423	300	246	211	145	122	64.1
9.90V	2244	1786	1111	703	421	298	244	210	145	121	64.0
10.2V	2151	1720	1077	685	417	296	243	208	144	121	63.8
10.5V	2059	1661	1050	672	411	294	241	207	143	120	63.4
10.8V	1943	1574	1012	651	400	285	234	201	138	119	63.0

Note: The above characteristics data can be obtained within three charge/discharge cycles.

## Dimensions

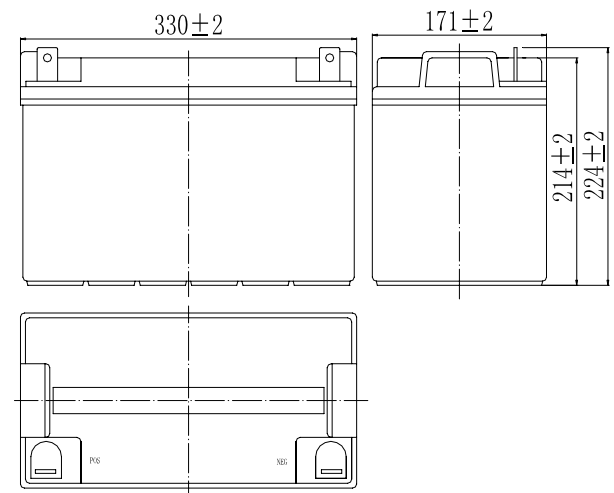

## Terminal


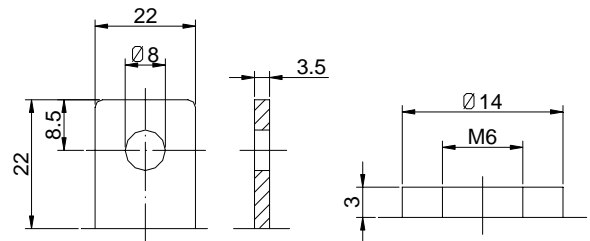


Terminal T5


Terminal T9

# LFP12100D(12V100Ah)


## Discharge Characteristics(25°C)

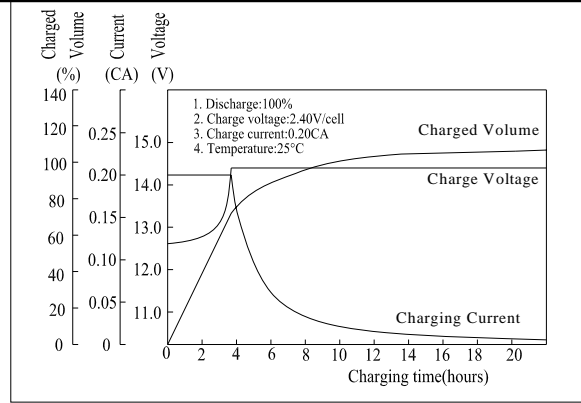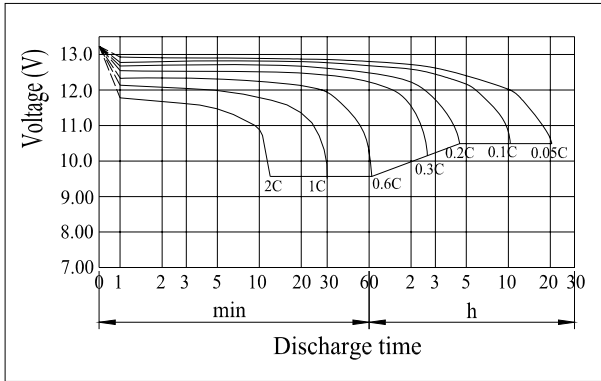


## Effect of Temperature on Capacity

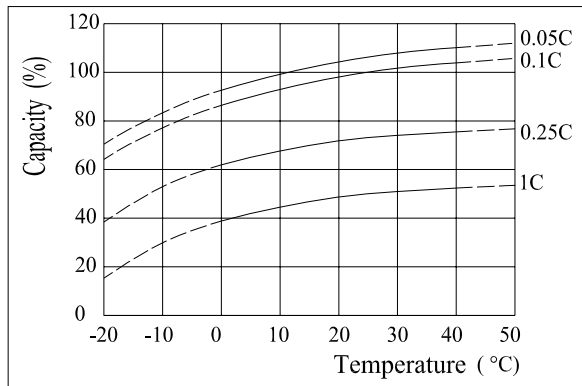


## Self-discharge Characteristics

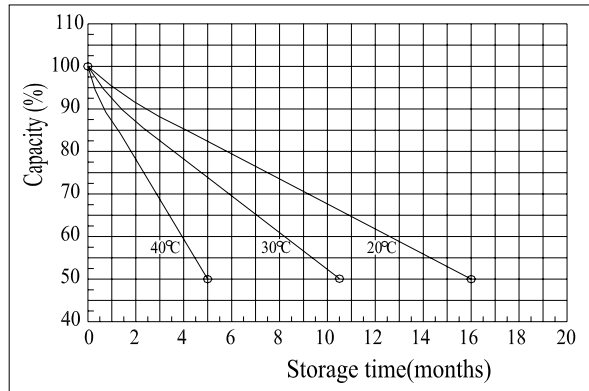


## The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

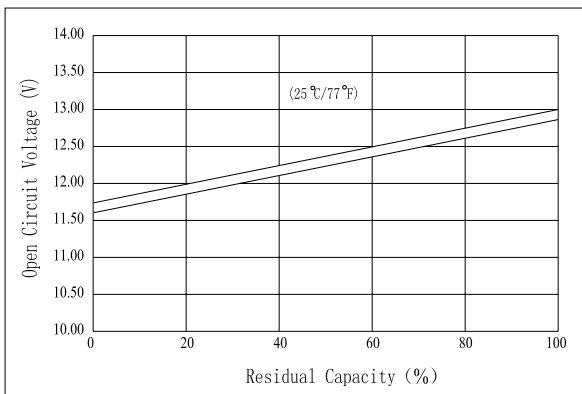


## The Relationship for Charging Voltage and Temperature

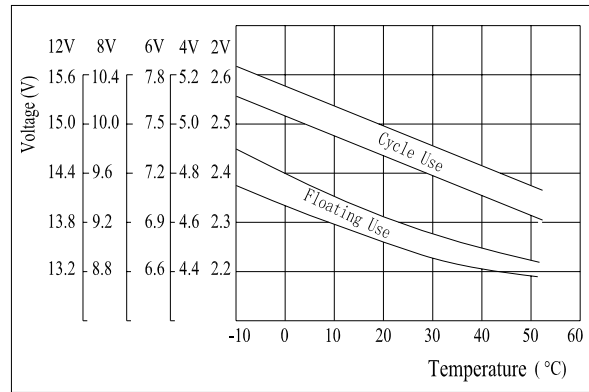

## Floating Life on Temperature

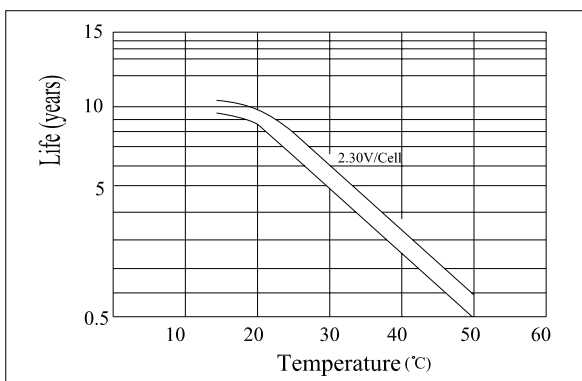

## Cycle Life on D.O.D.(25°C)

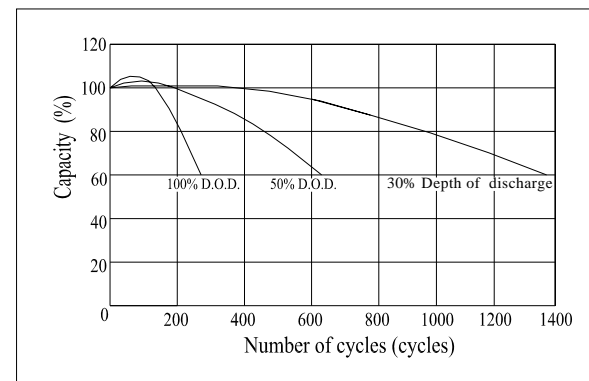

## Charging Characteristics(25°C)