

Specifications

Nominal Voltage		12 V
Capacity (25°C)	20HR(10.5V)	20 Ah
	10HR(10.5V)	18.6Ah
	1HR(9.60V)	13.1Ah
Dimension	Length	181 ± 2mm (7.13inch)
	Width	77 ± 1mm (3.03inch)
	Height	167 ± 2mm (6.57inch)
	Total Height	167 ± 2mm (6.57inch)
Approx. Weight		5.7kg (12.6lbs) ± 4%
Terminal type		T3/T8
Internal resistance (Fully charged, 25°C)		Approx. 12mΩ
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage(25°C)		13.60 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		6A
Terminal material		Copper
Maximum discharge current		300A(5 sec.)
Designed floating life(20°C)		3~5 years

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL & CE;
- ◆ ABS container.

Constant Current Discharge Characteristics (A, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	49.0	38.4	21.4	13.1	7.11	5.10	4.08	3.47	2.24	1.89	1.02
9.90V	47.5	37.5	21.0	12.9	7.06	5.07	4.06	3.45	2.23	1.88	1.01
10.2V	45.5	36.1	20.3	12.6	7.00	5.04	4.03	3.42	2.22	1.87	1.01
10.5V	43.6	34.8	19.8	12.4	6.90	5.00	4.00	3.40	2.20	1.86	1.00
10.8V	41.1	33.0	19.1	12.0	6.72	4.85	3.88	3.30	2.13	1.82	0.98

Constant Power Discharge Characteristics (Watt, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	552	438	245	152	83.1	60.6	48.6	41.4	26.9	22.7	12.2
9.90V	536	427	240	150	82.6	60.2	48.3	41.2	26.8	22.6	12.1
10.2V	514	411	233	146	81.9	59.8	48.0	40.9	26.6	22.5	12.1
10.5V	492	397	227	143	80.7	59.4	47.6	40.6	26.4	22.3	12.0
10.8V	464	376	219	139	78.6	57.6	46.2	39.4	25.6	21.9	11.8

Note: The above characteristics data can be obtained within three charge/discharge cycles.

Dimensions

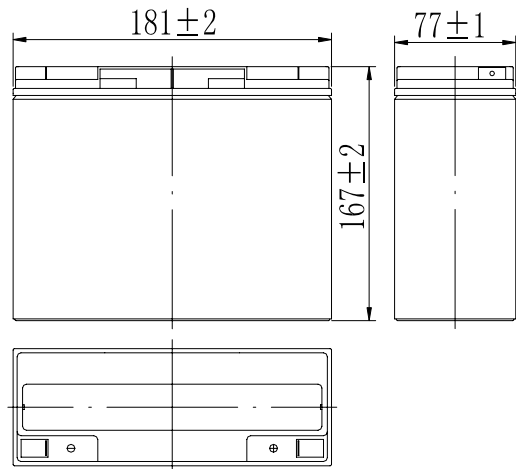



Terminal

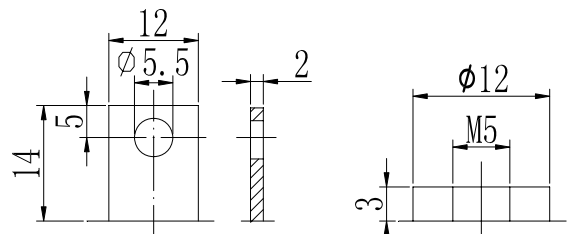


Terminal T3

Terminal T8


Discharge Characteristics(25°C)

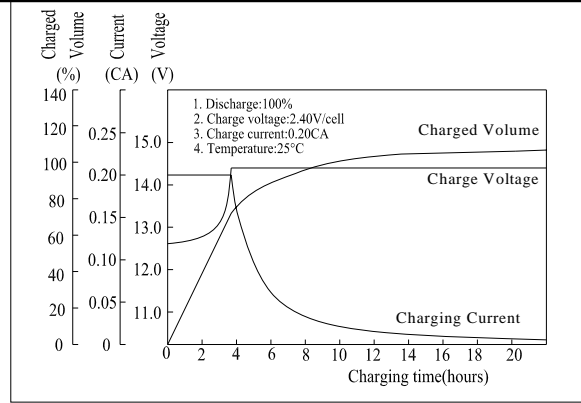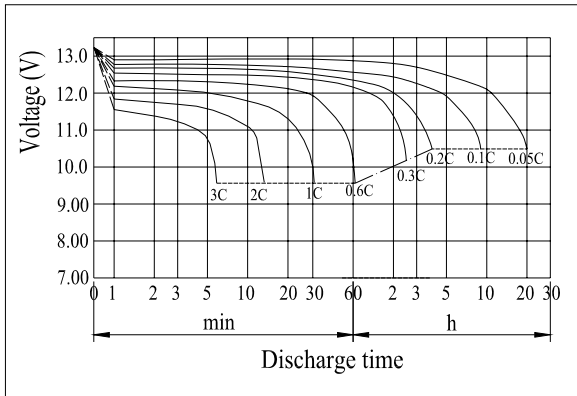


Effect of Temperature on Capacity

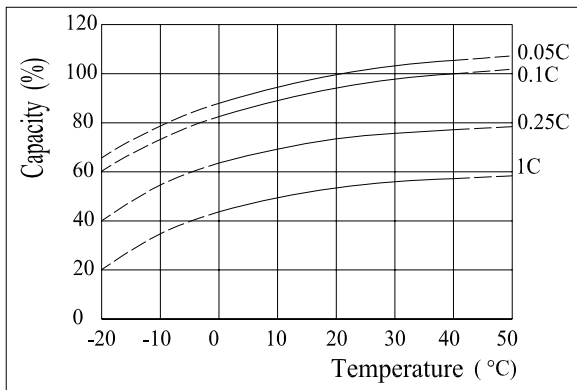


Self-discharge Characteristics

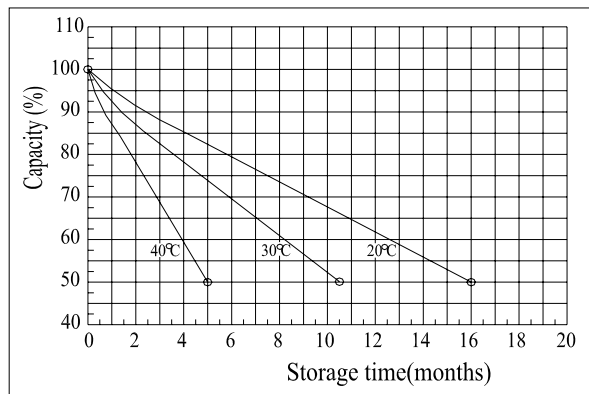


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

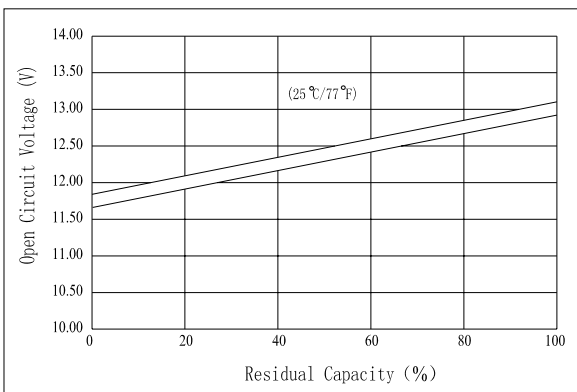


The Relationship for Charging Voltage and Temperature

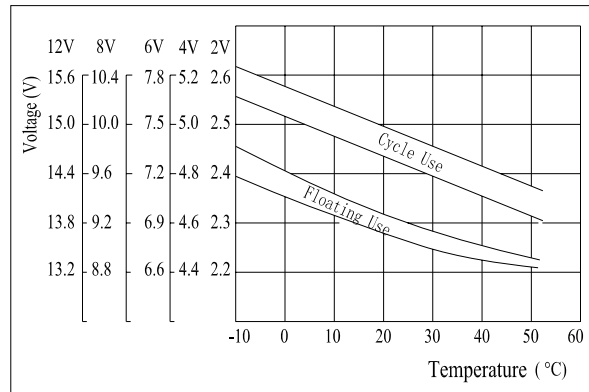

Floating Life on Temperature

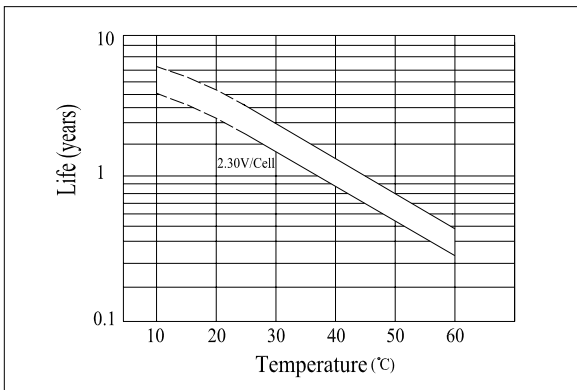

Cycle Life on D.O.D(25°C)

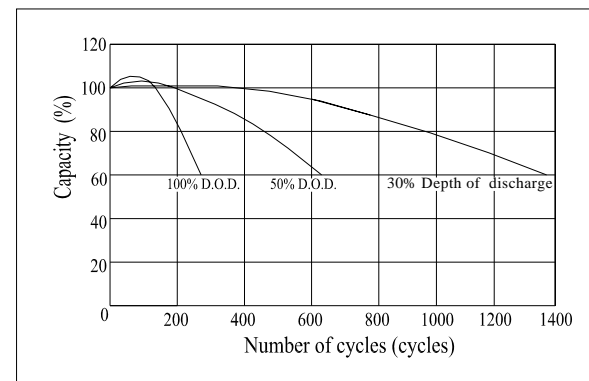

Charging Characteristics(25°C)