

Specifications

Nominal Voltage		12 V
Capacity (25°C)	20HR(10.5V)	12Ah
	10HR(10.5V)	11Ah
	1HR(9.60V)	7.8Ah
Dimension	Length	151 ± 1.5mm (5.94inch)
	Width	98 ± 1mm (3.86inch)
	Height	95 ± 1mm (3.74inch)
	Total Height	101 ± 1mm (3.98inch)
Approx. Weight		3.7kg (8.16lbs) ± 5%
Terminal type		T2/T1
Internal resistance (Fully charged, 25°C)		Approx. 19mΩ
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 70°C (5°F ~ 158°F)
	Charge	-10°C ~ 70°C (14°F ~ 158°F)
	Storage	-20°C ~ 70°C (-4°F ~ 158°F)
Float charging voltage(25°C)		13.60 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		3.6A
Terminal material		Copper
Maximum discharge current		180A(5 sec.)
Designed floating life(20°C)		5~7 years

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL & CE;
- ◆ ABS container.

Constant Current Discharge Characteristics (A, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	27.9	22.3	12.5	7.80	4.26	3.06	2.45	2.08	1.35	1.13	0.61
9.90V	27.1	21.8	12.2	7.68	4.24	3.04	2.43	2.07	1.34	1.13	0.61
10.2V	26.0	21.0	11.8	7.49	4.20	3.02	2.42	2.05	1.33	1.12	0.60
10.5V	24.9	20.3	11.6	7.34	4.14	3.00	2.40	2.04	1.32	1.12	0.60
10.8V	23.5	19.2	11.1	7.11	4.03	2.91	2.33	1.98	1.28	1.09	0.59

Constant Power Discharge Characteristics (Watt, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	315	255	143	90.3	49.9	36.4	29.2	24.8	16.2	13.6	7.31
9.90V	306	249	140	89.0	49.6	36.1	29.0	24.7	16.1	13.5	7.28
10.2V	293	239	136	86.7	49.1	35.9	28.8	24.5	16.0	13.5	7.24
10.5V	280	231	132	85.0	48.4	35.6	28.6	24.4	15.8	13.4	7.20
10.8V	265	219	128	82.4	47.2	34.6	27.7	23.6	15.4	13.1	7.06

Note: The above characteristics data can be obtained within three charge/discharge cycles.

Dimensions

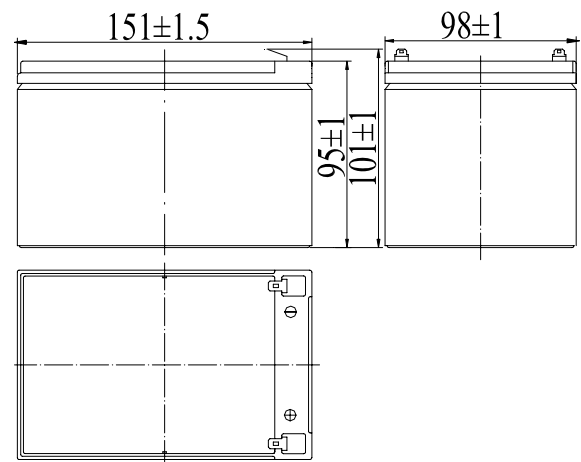

Terminal


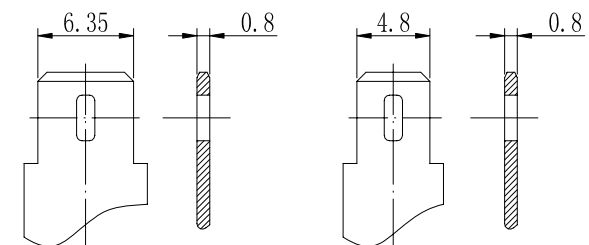


Terminal T2


Terminal T1

FP12120T (12V12Ah)


Discharge Characteristics(25°C)

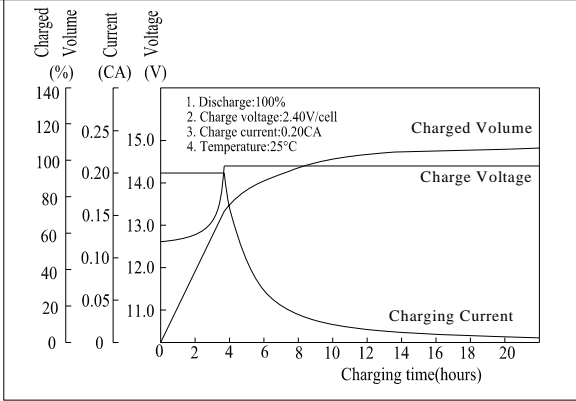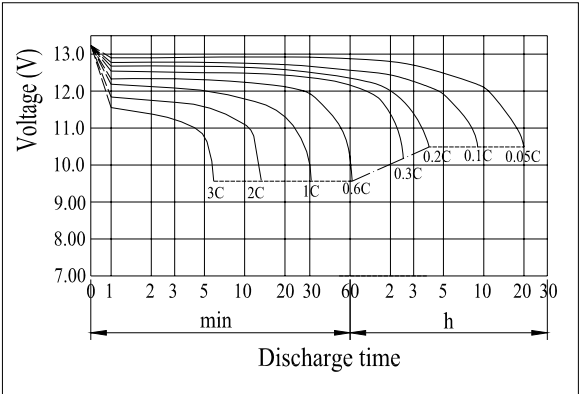


Effect of Temperature on Capacity

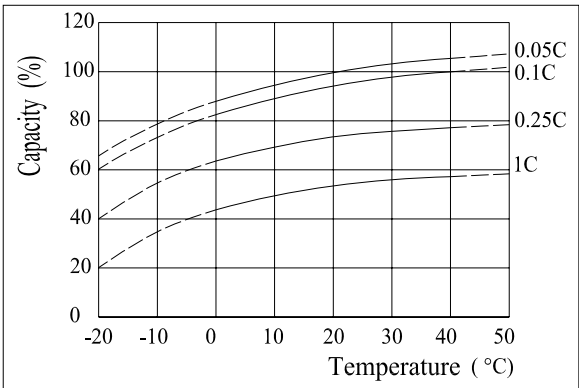


Self-discharge Characteristics

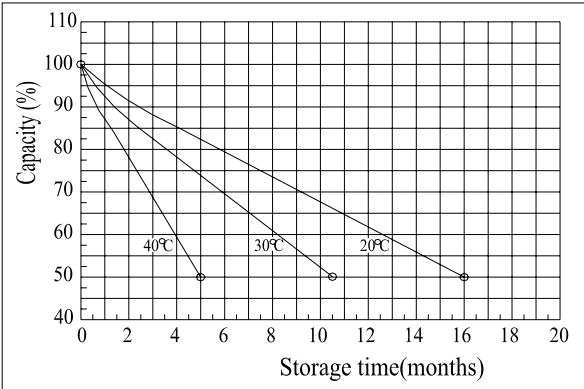


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

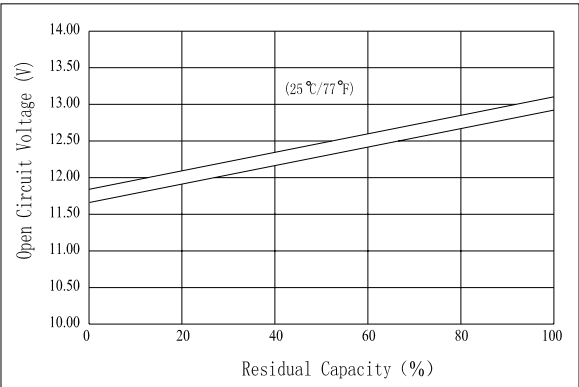


The Relationship for Charging Voltage and Temperature

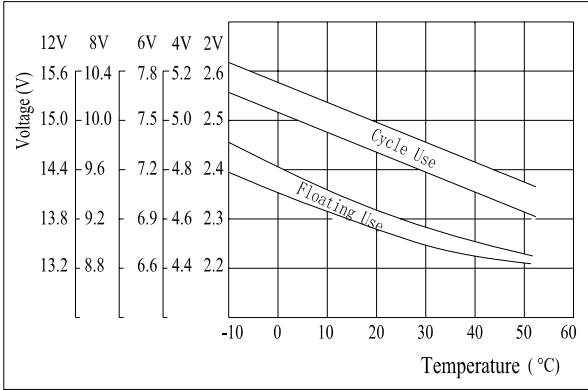

Floating Life on Temperature

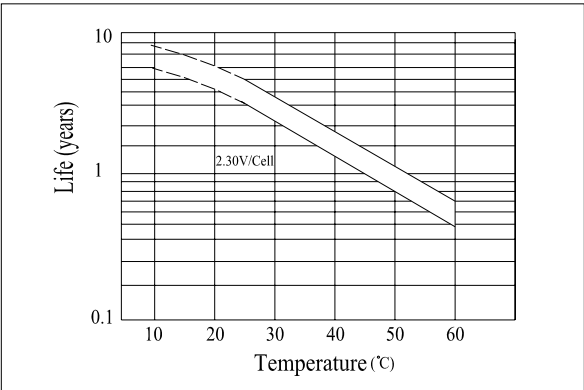

Cycle Life on D.O.D(25°C)

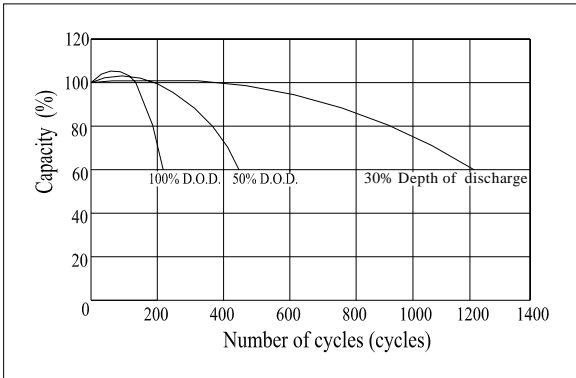

Charging Characteristics(25°C)